

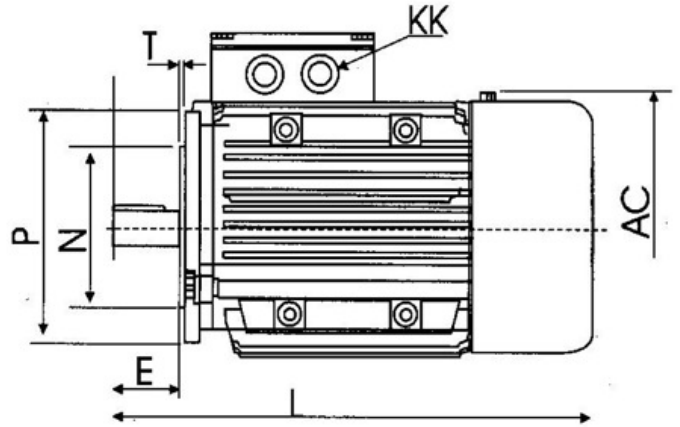

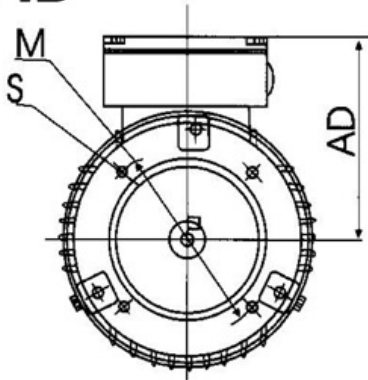
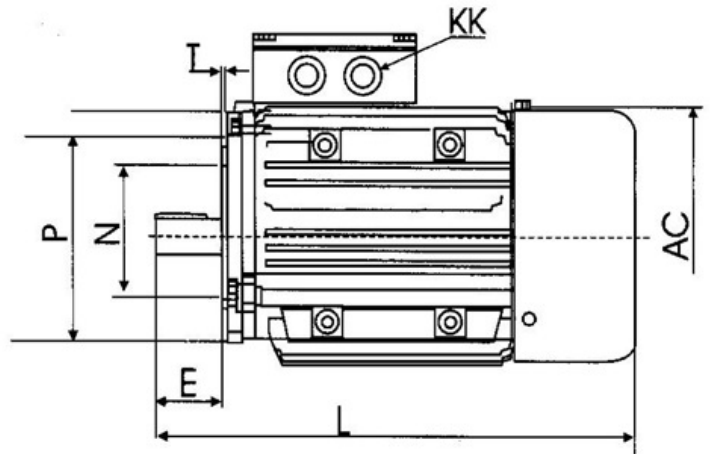


# B14B



# B14A

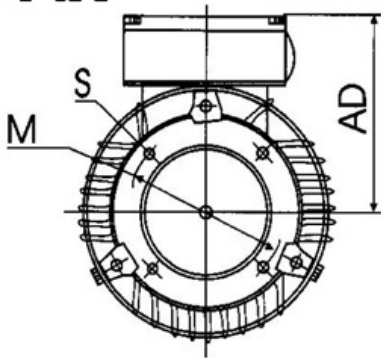

Motor-type	AC	AD	D	DH	E	F	G	KK	L	B14A					B14B				
										M	N	P	S	T	M	N	P	S	T
JF56	110	100	9	M4X12	20	3	7,2	1-M20X1,5	199	65	50	80	M5	2,5	85	70	105	M6	2,5
JF63	130	111	11	M4X12	23	4	8,5	1-M20X1,5	217	75	60	90	M5	2,5	100	80	120	M6	2,5
JF71	145	118	14	M5X12	30	5	11	1-M20X1,5	245	85	70	105	M6	2,5	115	95	140	M8	3
JF80	175	134	19	M6X16	40	6	15,5	1-M25X1,5	287	100	80	120	M6	3	130	110	160	M8	3,5
JF90S	195	140	24	M8X19	50	8	20	1-M25X1,5	315	115	95	140	M8	3	130	110	160	M8	3,5
JF90L	195	140	24	M8X19	50	8	20	1-M25X1,5	340	115	95	140	M8	3	130	110	160	M8	3,5
JF100L	215	160	28	M10X22	60	8	24	1-M32X1,5	385	130	110	160	M8	3,5	165	130	200	M10	3,5
JF112M	240	178	28	M10X22	60	8	24	2-M32X1,5	400	130	110	160	M8	3,5	165	130	200	M10	3,5
JF132S	275	206	38	M12X28	80	10	33	2-M32X1,5	483	165	130	200	M10	3,5	215	180	250	M12	4
JF132M	275	206	38	M12X28	80	10	33	2-M32X1,5	510	165	130	200	M10	3,5	215	180	250	M12	4